




Scheme



Photometry

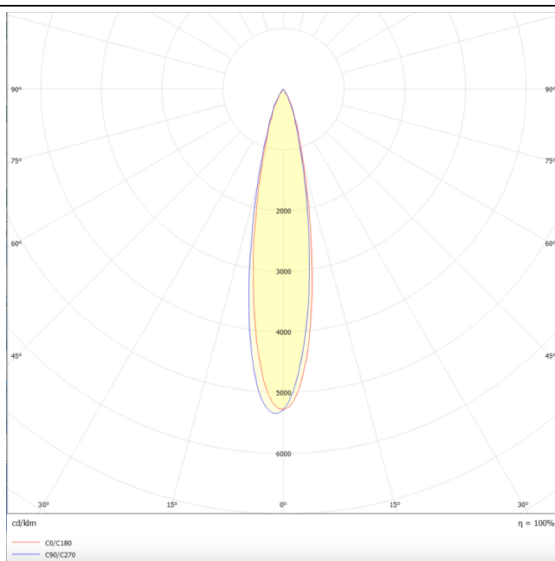

Star

Lavov downlight from the family STAR with a power of 30W and an optics 15 degrees . CCT 4000K. With a total lumen output of 2100lm and a luminous efficiency of 70lm/W.DALI driver. Made in die cast aluminum and finished in White color. UGR19.

| | |
|--------------|-----------------|
| Item code | 86.D029.5413.01 |
| Product type | Indoor |
| Category | Downlights |
| Family | STAR |
| Subfamily | Star |
| Pictograms | |

Product

| | |
|-----------------------------|----------------|
| Real power (W) | 30 |
| Real luminous flux (Lm) | 2100 |
| Luminous efficiency (Lm/W) | 70 |
| Beam angle (°) | 15 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | White |
| U. G. R | UGR19 |
| Control gear included | Yes |
| Control gear | DALI |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | COB |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 90 |