




AQUILA II

Lavov flood light from the family AQUILA II with a power of 100W and an optics 60º degrees . CCT 4000K. With a total lumen output of 15500lm and a luminous efficiency of 155lm/W.DALI driver. Made in die cast aluminum and finished in Black color. IP66 and IK 08 degree of protection.

Item code	86.I0018.2423.02
Product type	Outdoor
Category	Floodlights
Family	AQUILA II
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div> 850°</div><div>SDCM 3</div></div> <div><div></div><div>Driver INCL.</div><div></div><div></div><div></div></div> <div><div>IP 66</div><div>CRI 70</div><div>IK 08</div><div>50000h L70B50</div></div>

Scheme

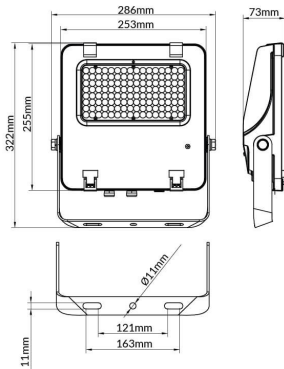

Product	
Real power (W)	100
Real luminous flux (Lm)	15500
Luminous efficiency (Lm/W)	155
Beam angle (º)	60º
Life time (h)	50000h L70B50
IP	66
Electrical class insulation	Class I
Colour	Black
Control gear included	Yes
Control gear	DALI
Light source	LED
Type of LED	2835
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<5
CRI	≥70
IK	08