




### Ceiling washer

Lavov linear system from the family Ceiling washer with a power of 25W and a beam angle of 15° assymmetric. Surface mounted. Finished in Black colour. Dimensions L1000\*22.5\*23.5mm. With a total lumen output of 2500lm and a luminous efficacy of 100lm/W. Made in Extruded Aluminium. Driver not included. CCT 4000K.


### Dimensions

**Product dimensions (mm)** L1000\*22.5\*23.5mm

### Scheme

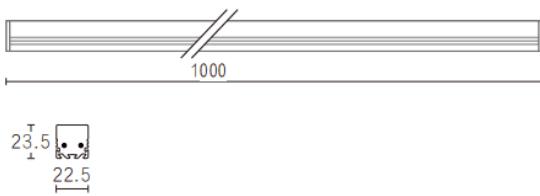

### Photometry

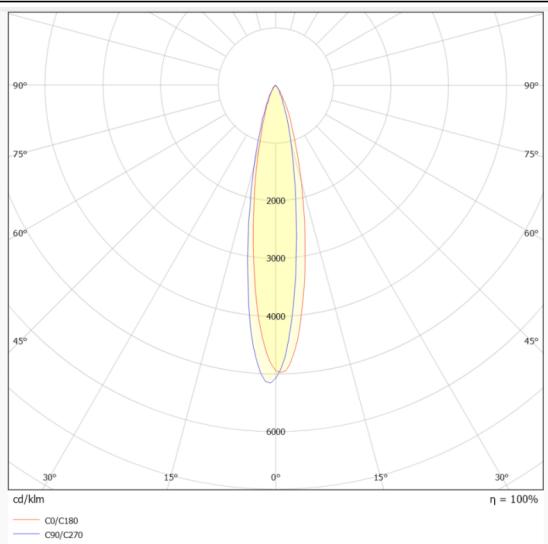

|                     |  |
|---------------------|--|
| <b>Item code</b>    | 86.L005.1453.02  |
| <b>Product type</b> | Indoor   |
| <b>Category</b>     | Linear Systems   |
| <b>Family</b>       | Surface washer   |
| <b>Subfamily</b>    | Ceiling washer   |
| <b>Pictograms</b>   |     <br> |

### Product

|                                    |               |
|------------------------------------|---------------|
| <b>Real power (W)</b>              | 25            |
| <b>Real luminous flux (Lm)</b>     | 2500          |
| <b>Luminous efficiency (Lm/W)</b>  | 100           |
| <b>Beam angle (°)</b>              | 15            |
| <b>Life time (h)</b>               | 50000h L80B10 |
| <b>Electrical class insulation</b> | Class II      |
| <b>Colour</b>                      | Black         |
| <b>U. G. R</b>                     | 22            |
| <b>Control gear included</b>       | No            |
| <b>Control gear</b>                | not included  |
| <b>Power Factor</b>                | no incluido   |
| <b>Light source</b>                | LED           |
| <b>Type of LED</b>                 | SMD           |
| <b>Average life time (h)</b>       | 50000h L80B10 |
| <b>Colour temperature (K)</b>      | 4000          |
| <b>Colour consistency (SDCM)</b>   | SDCM<3        |
| <b>CRI</b>                         | 80            |