




**Dimensions**

**Product dimensions (mm)**      **240x635x85mm**

**Scheme**

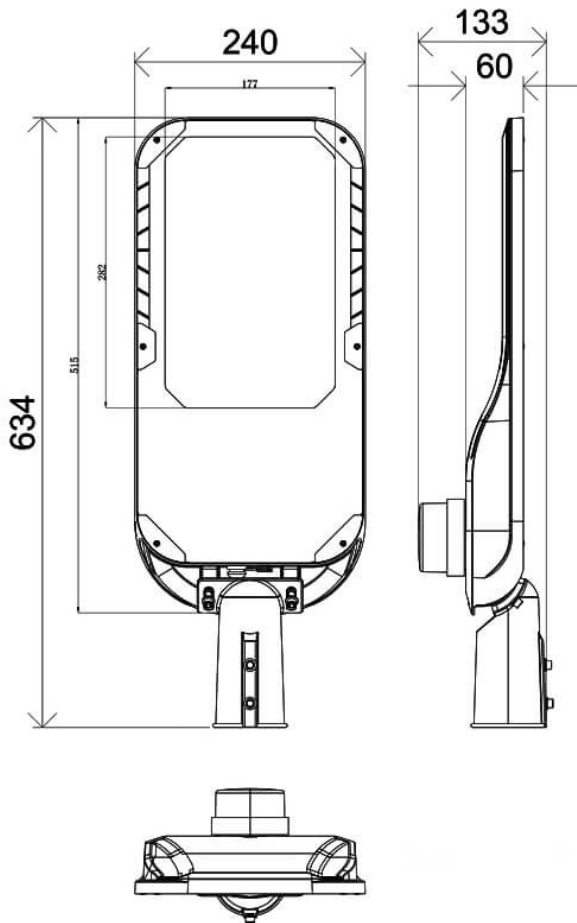

### Vialight II

Lavov Street light from the family Vialight II with a power of 150W and an optics T2 (150°X75°) degrees . CCT 4000K. With a total lumen output of 22500lm and a luminous efficiency of 150lm/W.DALI driver. Made in die cast aluminum and finished in Grey color. IP65 and IK IK08 degree of protection.

|              |  |
|--------------|--|
| Item code    | 86.OS11.8473.03  |
| Product type | Outdoor  |
| Category     | Street lights  |
| Family       | Vialight II  |
| Pictograms   | 220 240 V  850°  Driver INCL.<br>IP 65  CRI 70<br>SDCM 5  50000h L70B10  IK 08 |

|                             |                               |
|-----------------------------|-------------------------------|
| Product                     |                               |
| Real power (W)              | 150                           |
| Real luminous flux (Lm)     | 22500                         |
| Luminous efficiency (Lm/W)  | 150                           |
| Beam angle (°)              | T2 (150°X75°)                 |
| Life time (h)               | 50000h L70B10                 |
| IP                          | 65                            |
| Electrical class insulation | Class I                       |
| Colour                      | Grey                          |
| Control gear included       | Yes                           |
| Control gear                | DALI                          |
| Light source                | LED                           |
| Type of LED                 | Sanan / SMD3030               |
| Average life time (h)       | Up to 100,000hrs LM70,Ta 25°C |
| Colour temperature (K)      | 4000                          |
| Colour consistency (SDCM)   | SDCM<6                        |
| CRI                         | ≥70                           |
| IK                          | IK08                          |