




UP&DOWNNT

Lavov wall fixture from the family UP&DOWNNT with a power of 2x8W and a 60 degrees beam angle. Finished in Black colour. Dimensions $\phi 60 \times 83 \times 180 \text{mm}$. With a total lumen output of 2x800lm and a luminous efficiency of 100lm/W. CCT 3000K. Driver DALI. Made in Die Cast Aluminium Body, Tempered Glass Cover .IP65. IK05

Dimensions

Product dimensions (mm) $\phi 60 \times 83 \times 180 \text{mm}$

Scheme

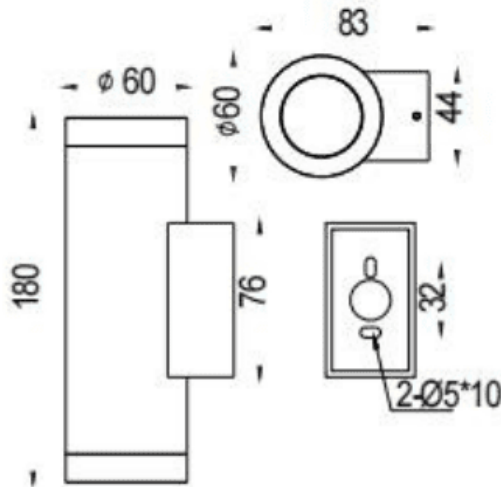

| | |
|--------------|-----------------|
| Item code | 86.OW09.2343.02 |
| Product type | Outdoor |
| Category | Wall Light |
| Family | UP&DOWNNT |
| Pictograms | |

| | |
|-----------------------------|---------------|
| Product | |
| Real power (W) | 2x8 |
| Real luminous flux (Lm) | 2x800 |
| Luminous efficiency (Lm/W) | 100 |
| Beam angle (°) | 60 |
| Life time (h) | 50000h L70B10 |
| IP | IP65 |
| Electrical class insulation | Class I |
| Colour | Black |
| Control gear included | Yes |
| Control gear | DALI |
| Light source | LED |
| Type of LED | COB |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 80 |
| IK | IK05 |