


## MARC

Lavov surface mounted luminaire from the family MARC with a power of 40W and a beam angle of 110 degrees . UGR<22. Finished in white colour. With a total lumen output of 5000lm and a luminous efficacy of 125lm/W. Made in Aluminum structure powder painted . Driver On-Off. CCT 3000K. Dimensions 639x639x70mm.Class II isoltationElectrical feeding: 220/240V.


| | |
|---|---|
| **Item code** | **86.SM01.1341.01** |
| **Product type** | **Indoor** |
| **Category** | **Surface mounted Fixtures** |
| **Family** | **MARC** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **639x639x70mm** |

## Scheme

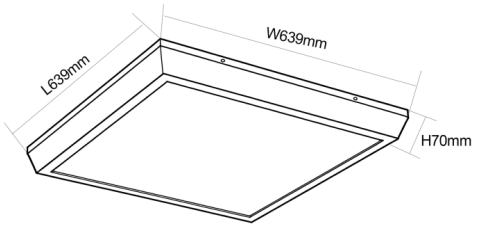


## Photometry

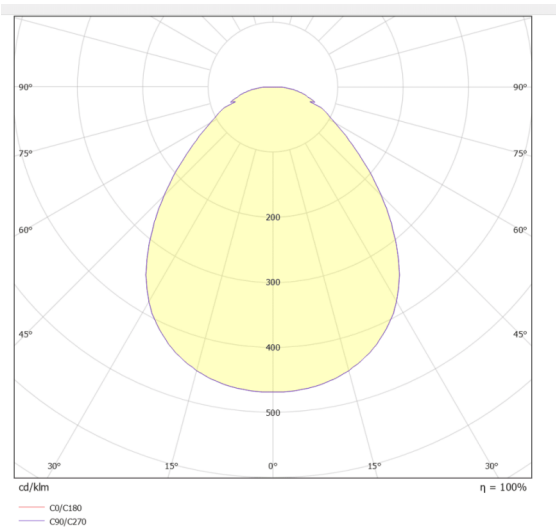


| **Product** | |
|---|---|
| **Real power (W)** | **40** |
| **Real luminous flux (Lm)** | **5000** |
| **Luminous efficiency (Lm/W)** | **125** |
| **Beam angle (º)** | **110** |
| **Life time (h)** | **50000h L90B10** |
| **IP** | **65** |
| **Electrical class insulation** | **Class II** |
| **Electrical feeding** | **220/240V** |
| **Colour** | **white** |
| **U. G. R** | **22** |
| **Chip Brand** | **Sanan** |
| **Control gear included** | **Yes** |
| **Control gear** | **On-Off** |
| **Power Factor** | **0.95** |
| **Flicker Free** | **yes** |
| **Light source** | **LED** |
| **Type of LED** | **SMD 2835** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM4** |
| **CRI** | **80** |
| **IK** | **10** |