




SOLARTABLET

Lavov Solar Street light luminaire from the family SOLARTABLET, with a power of 48W and a T3 type lighting distribution. With microsensor. With a total lumen output of 8800 and a luminous efficacy of 170lm/W. Made in Die cast aluminium fixture body, PC lenses, solar panel 36W, battery type LiFePO4:12,8V, 32Ah, 409,6Wh. IP65. CRI80 . CCT 4500K. Driver . Finished in grey color. With microsensor inductive Range: ≤8m & ≤180degree. Working Mode: Stand by power: 50% standby at first half-hour; 100% standby at second half-hour; then keep 10% standby. Induction: 100% brightness 120s

Scheme

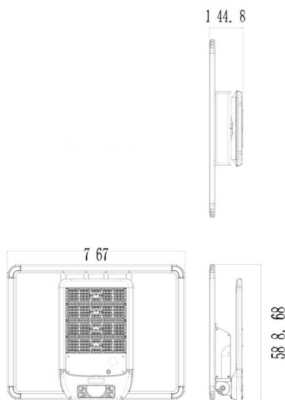

Item code	86.SO20.343S.03
Product type	Outdoor
Category	Solar Street Lights
Family	SOLARTABLET
Subfamily	SOLARTABLET
Pictograms	<div style="display: flex; gap: 10px;"> <div style="border: 1px solid black; border-radius: 5px; padding: 2px 5px;">CRI 80</div> <div style="border: 1px solid black; border-radius: 5px; padding: 2px 5px;">IP 65</div> </div>

Product	
Real power (W)	48
Real luminous flux (Lm)	8800
Luminous efficiency (Lm/W)	170
Beam angle (°)	T3
IP	65
Colour	grey
Control gear included	yes
Light source	LED
Type of LED	224 pieces high efficiency 3030 SMD chip
Colour temperature (K)	4500K
Colour consistency (SDCM)	<5SDCM
CRI	80