


Code article 86.ML01.3312.02







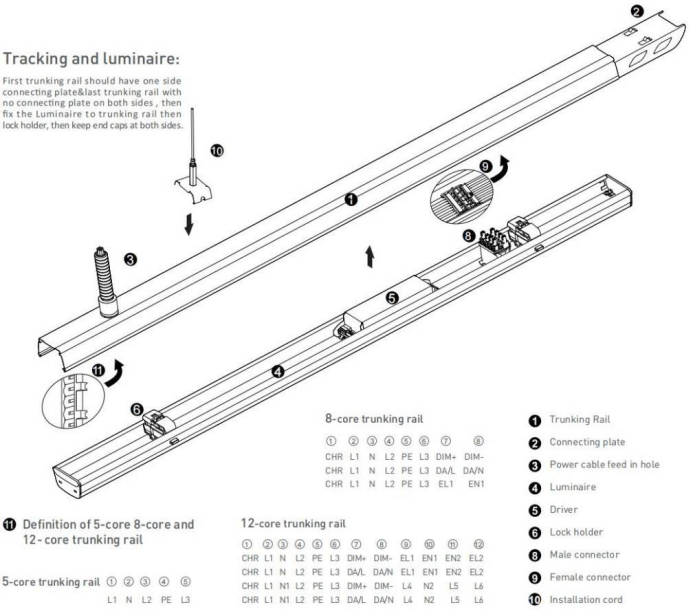

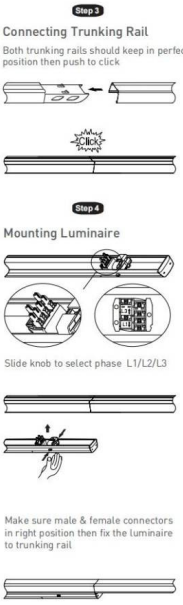

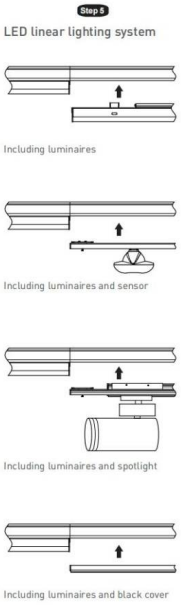



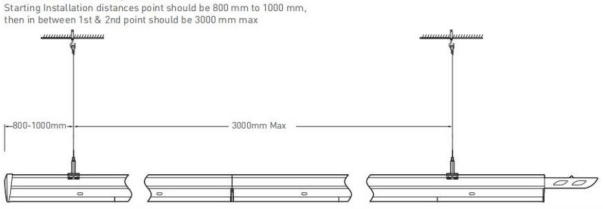




Code article 86.ML01.3312.02

Safety notes:
Installation should be performed only by qualified electrician .


- Make sure no voltage while installation .
- Connect cable wires according to wire labeling.
- Max current should not exceed 16A in one power feed in circuit.

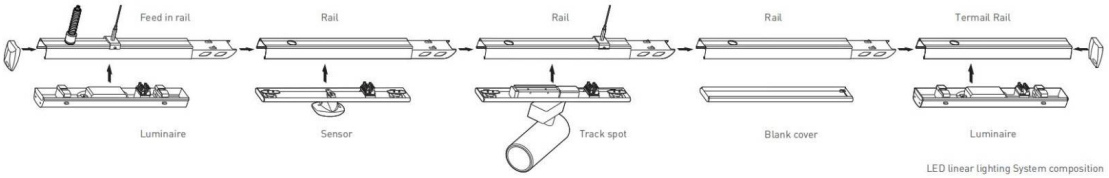

LED linear lighting System composition

Terminal module:

Terminal module can be independently installed as a single unit, it also can be connected at end of one linear light row.

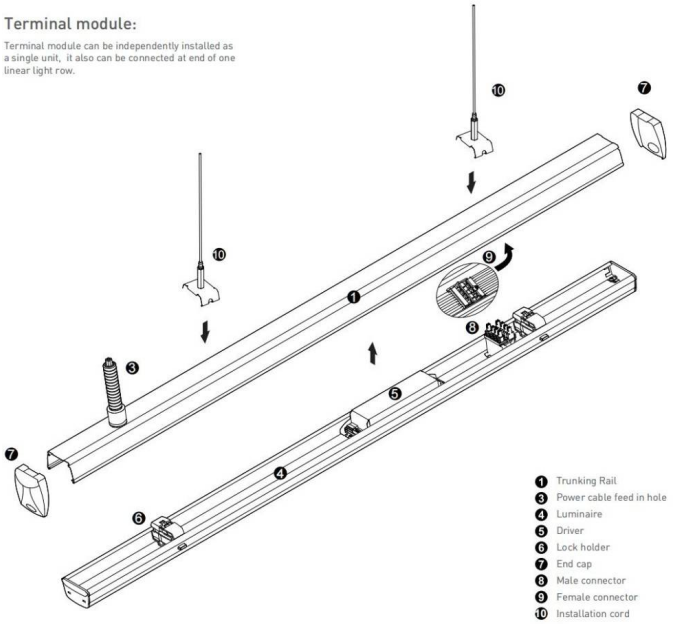

1. Trunking Rail
3. Power cable feed in hole
4. Luminaire
5. Driver
6. Lock holder
7. End cap
8. Male connector
9. Female connector
10. Installation cord


Step 1


Mounting Suspension

Drill a hole on ceiling




Fix mounting hook into ceiling





Adjust length of suspension cord:
a. press down Hexagon bolt;
b. Pull in/out cord to adjust length



Click in mounting clip into trunking rail

Step 2


Connecting Power Supply



Cut the Rubber cap to pass the power cable



Screw in the conduit gland




Put in conduit with cable inside and pull up conduit gland to lock




Connect wires according labeling on wires to feed in connector then connect to connector in trunking rail

Step 3

Mounting Luminaire



Slide knob to select phase L1/L2/L3



Make sure male & female connectors in right position then fix the luminaire to trunking rail



Push the sliding lock to lock the luminaire to trunking rail